

CONTACT INSTALLING TOOLS



FRONT RELEASE REAR RELEASE

Installing tools in these styles are used primarily with front release connectors such as those noted below. This tool style can also be used with rear release connectors as well.


CONTACT REMOVAL TOOLS



FRONT RELEASE REAR REMOVAL

Front release removal tools in which the tool is inserted into the front of the connector to release the contact locking mechanism are used with connectors such as MIL-C-26482, MIL-C-26500, MIL-C-26518, MIL-C-38300, MIL-C-28840, MIL-C-5015, MIL-C-81659 and MIL-C-81703.

CONTACT INSTALLING/REMOVAL TOOLS

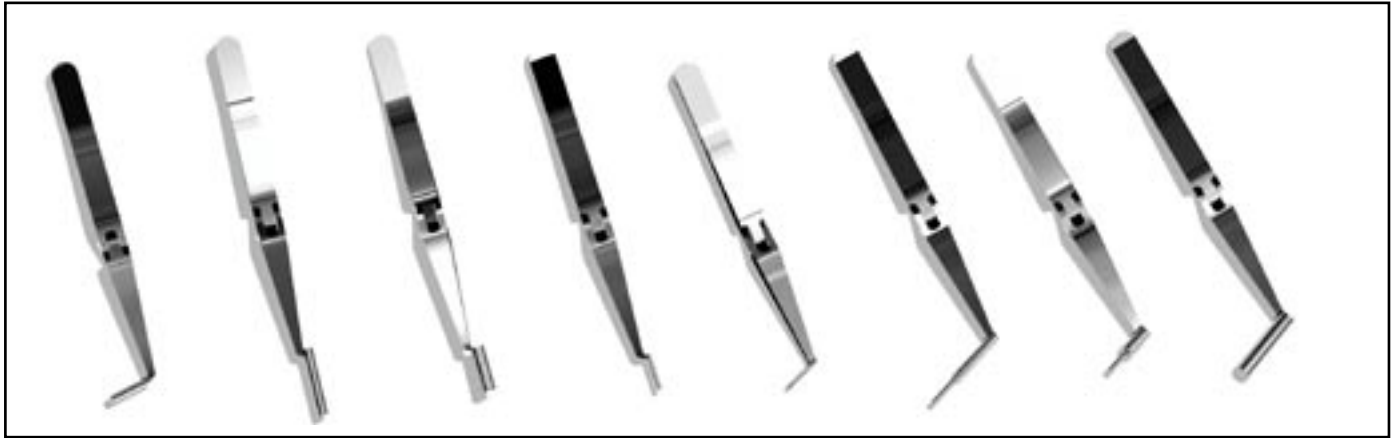

REAR RELEASE

Tweezer style installing and removal tools are designed to accommodate rear release connectors such as MIL-C-38999, NAS 1599, MIL-C-005015, MIL-C-81511 and MIL-C-83723.

These tools are available with angled tips, offset straight tips and in-line straight tips. Tools are qualified to MIL-C-81969-1 thru / 8-10. An extensive series of mil-spec as well as custom designs are available.

Pico welcomes the opportunity to design a tool to meet your specific requirements.

CUSTOM DESIGNS



Pico also produces an extensive line of proprietary design installing and removal tools. These include plier type, impact style, in-line tips, off-set tips,

plastic and metal tips, spring loaded or non-spring style. Multiple tips kits and unwired contact removal tools.